

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 20/50, BP 20/50 D



Maximum reliability

Engine and V-belts protected against damage



Powerful vibration

Plastic mat for paving work (optional)




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3

BP 20/50 0,236
BP 20/50 D 0,245

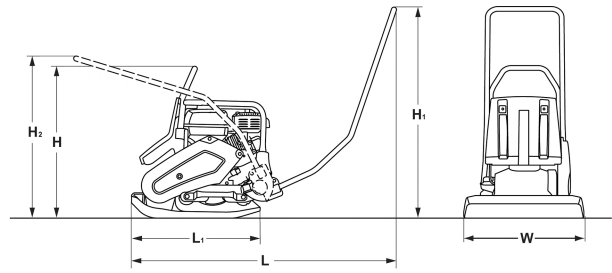

Standard Equipment

- Vibration insulated steering bow, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level (BP20/50)
- Recoil starter
- Engine protection frame
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- Protective covering
- 3-2-1 Warranty
- Fully automatic decompression (BP20/50D)

Dimensions in mm

	H	H1	H2	L	L1	W
BP 20/50	658	962	700	1084	542	500
BP 20/50 D	708	962	700	1084	542	500

Technical Data

Weights

Operating weight CECE	kg	95	109
Basic weight	kg	94	108

Dimensions

Working width	mm	500	500
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	30	30
Max. gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		StageV/CARB P.3	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	kW	3,6	3,1
Performance ISO 3046	kW	3,6	3,1
Speed	min-1	3.600	3.000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	1,1	0,7

Exciter system

Frequency	Hz	90	90
Centrifugal force	kN	20	20
Amplitude	mm	1,70	1,70

Capacities

Fuel	l	3,1	3,0
Water	l	13,5	13,5

Technical modifications reserved. Machines may be shown with options.

Optional Equipment

- Sprinkler system (+10kg)
- Transport wheels (+4kg)
- Plastic mat
- Tool kit
- Special painting
- Service Kit
- Steering handle centre-position (BP20/50)
- TOUGH WARRANTY
- Comfort guide handle
- Central comfort guide handle (BP20/50)



PRE 230 16 010

300120 Sa04

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

