

TECHNICAL DATA

TAMPER

BVT 65




Reliable and long lasting

Engine protection, fuel filter, automatic oil level control



More transparency

Hour meter RPM-meter with service indicator (optional)

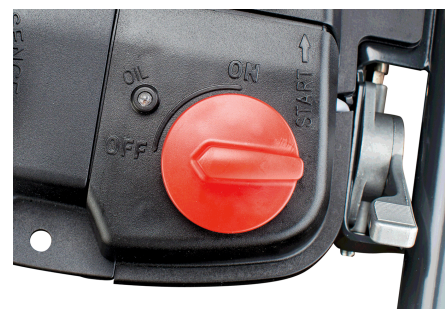


Simple operation

Engine and fuel supply with combined switch

Shipping dimensions in m3
BVT 65

0,262



Standard Equipment

- Engine Protection System
 - Protective engine covering
 - Automatic oil level control
 - Dual fuel filter system
- Vibration insulated steering handle
- Self-cleaning air filter housing
- Protective covering
- Single point lifting device
- Recoil starter
- Plastic castor as loading aid
- Infinitely variable frequency
- Combination of engine stop/fuel switch
- 3-2-1 Warranty

Optional Equipment

- Transport device with puncture proof wheels
- Tamper foot widths (160-330mm)
- Tamper foot extensions
- h-/ rpm meter
- Special painting
- Tool kit
- Service Kit
- TOUGH WARRANTY

Dimensions in mm

	B	H	L	L1	W
BVT 65	350	1030	728	335	280

Technical Data

Weights

Operating weight CECE	kg	67
Basic weight	kg	66

Dimensions

Working width (tamper plate)	mm	280
------------------------------------	----	-----

Driving Characteristics

Working speed max.	m/min	20
Area coverage max.	m ² /h	336

Drive

Engine manufacturer	Honda	
Type	GX 100	
Emission stage	Stage V / CARB P.3	
Cooling	air	
Number of cylinders	1	
Performance SAE J 1349	2,3	
Fuel	Gasoline	
Drive system	mech.	
Fuel comsump. aver. during operation	l/h	0,9

Exciter system

Frequency	Hz	10- 11,8
Impact force	kN	16,0
Jumping height	mm	70,0

Capacities

Fuel	l	3,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.

BOMAG

BVT 65



PRE 541 21 010

210122 Sa02

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

