

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 35/60, BPR 35/60 D



Robust and reliable
Best component protection




Precise and save to operate
Comfortable control lever



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in m3

BPR 35/60	0,556
BPR 35/60 D	0,607

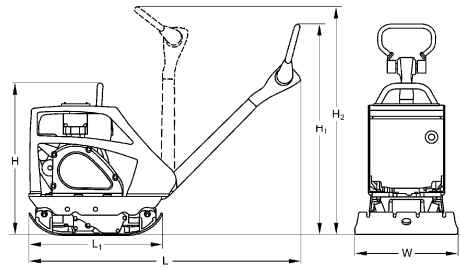

Standard Equipment

- Protective engine covering
- Comfortable control lever
- Height adjustable steering rod
- Low vibration steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Automatic decompression (BPR35/60D)
- Recoil starter
- Back-up drive protection
- Automatic shutdown at low oil level (BPR35/60)
- 3-2-1 Warranty
- Hour meter (Engine protection hood BPR35/60)

Optional Equipment

- Fully closed engine protection hood made of high-strength steel (+10kg)
- Transport wheels (+5kg)
- Electric starter+ Hour meter (+20kg) (BPR35/60D)
- Tool kit
- Special painting
- Plastic mat
- Service Kit
- Hour meter (BPR35/60)
- TOUGH WARRANTY

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 35/60	660	1020	1150	1405	762	600
BPR 35/60 D	720	1020	1150	1405	762	600

Technical Data

Weights

Operating weight CECE (W)	kg	205
Basic weight	kg	202

Dimensions

Basic working width	mm	600	600
Lowest passing height	mm	660	720
Min. height w. steering in top position	mm	1.020	1.020
Max. height w. steering in top position	mm	1.120	1.120

Driving Characteristics

Working speed, max.	m/min	27	27
Max. gradeability (dep. on soil con.)	%	32	32

Drive

Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		StageV/CARB P.3	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	kW	3,6	
Performance ISO 3046	kW		3,1
Speed	min-1	3.600	3.000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	1,1	0,7

Exciter system

Frequency	Hz	80	80
Centrifugal force	kN	35	35
Amplitude	mm	1,30	1,30

Capacities

Fuel	l	3,1	3,0
------------	---	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRE 692 67 010

030321 Sa05

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

